



FACT SHEET

February 2020

Footpath Construction — Herbert Street (Miller Street to Edward Street)

PROJECT:

This project provides for the construction of a 1.3m wide concrete footpath on the northern side of Herbert Street from Miller Street to Edward Street.

PROJECT ESTIMATE:

\$40,000 (this project is partly funded through the State Government's Transport Infrastructure Development Scheme (TIDS))

PROJECT SCOPE OF WORKS:

The Project scope is as follows:

- Concrete footpath construction
- Replacement of concrete driveway crossovers
- New kerb ramp
- Tree trimming
- Topsoiling and reinstatement of nature strip

The traffic management plan that will be put in place for the duration of the construction period will be developed prior to works commencing.





INDICATIVE PROJECT MILESTONES

Nov 2019	Final Design
April 2020	Construction Period
May 2020	Project Completion

Note: Project milestones are subject to weather and may change.

Footpath Construction — Herbert Street (Miller Street to Edward Streets)

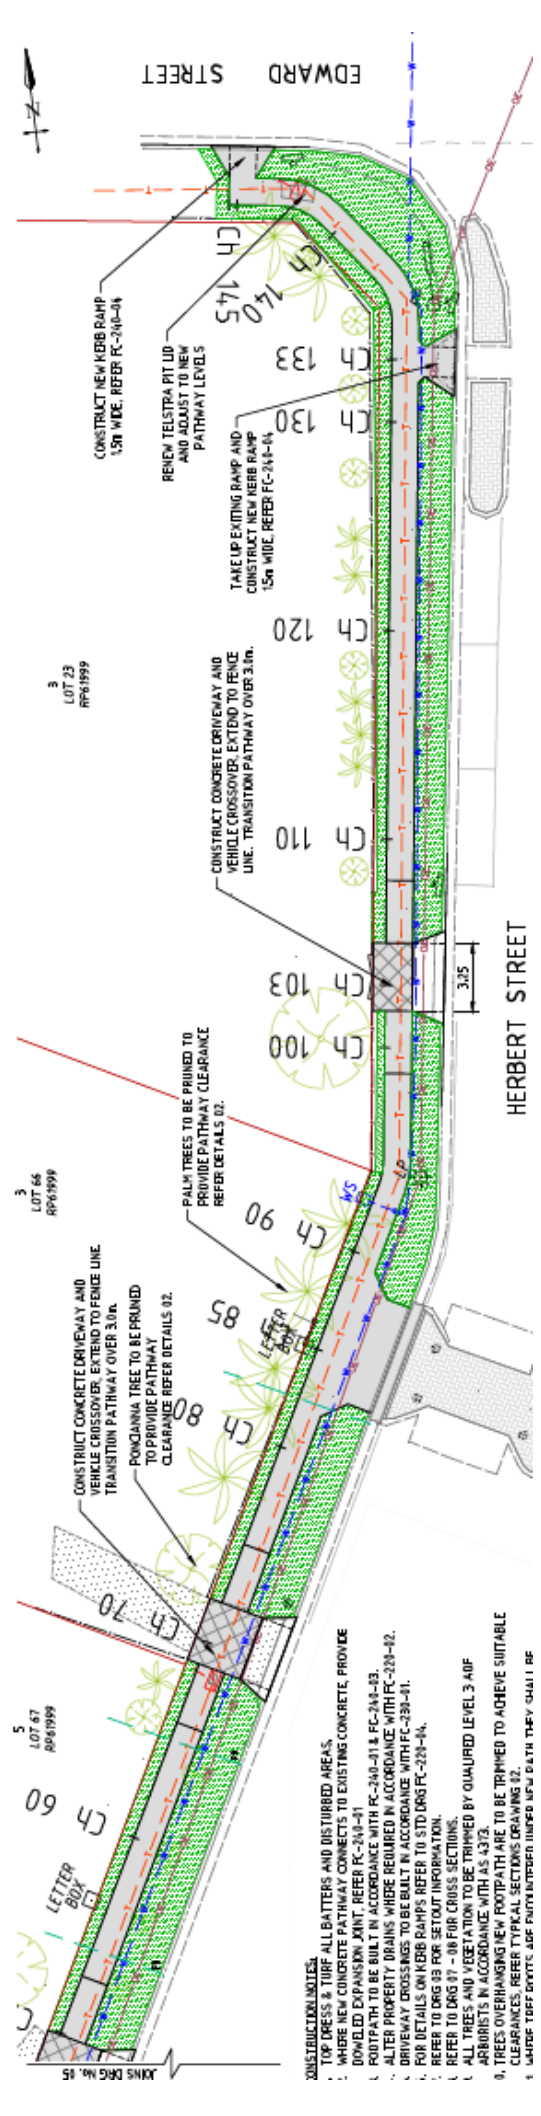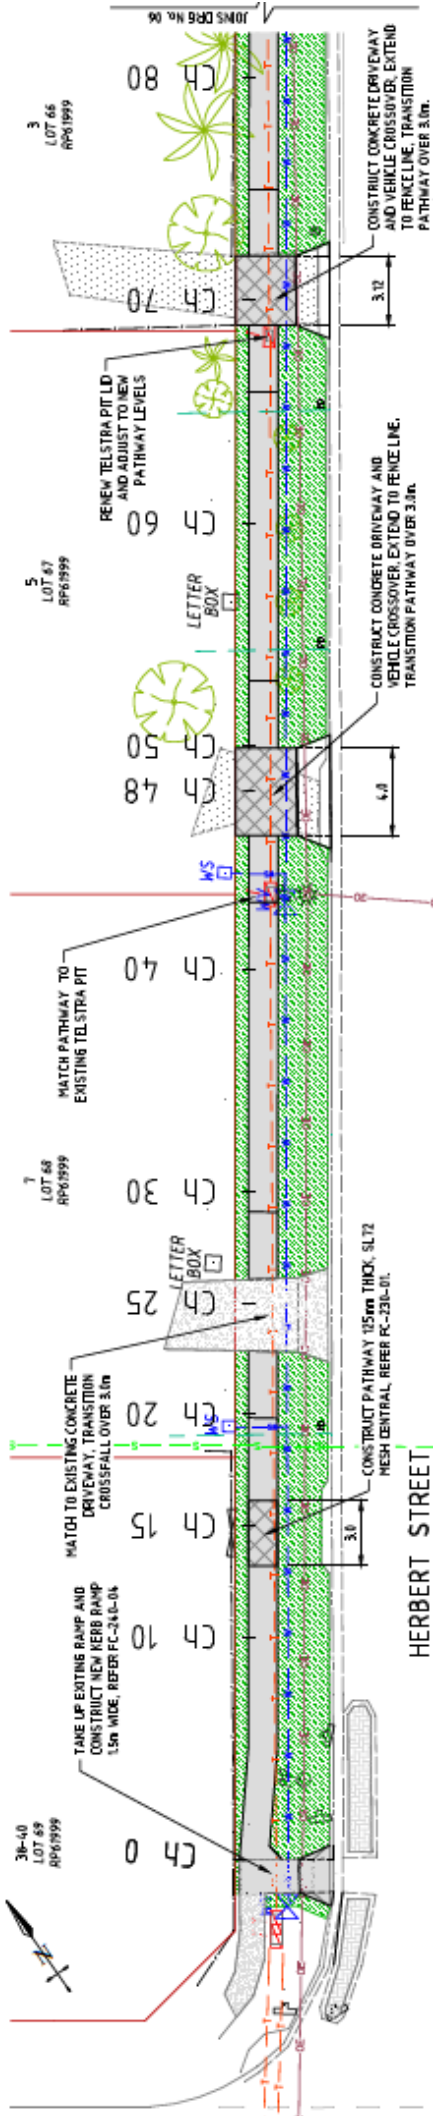

- CONSTRUCTION NOTES:**
- TOP DRESS & TURF ALL BATTERS AND DISTURBED AREAS.
 - WHERE NEW CONCRETE PATHWAY CONNECTS TO EXISTING CONCRETE, PROVIDE DOWNLAP EXPANSION JUNT. REFER FC-244-01
 - FOOTPATH TO BE BUILT IN ACCORDANCE WITH FC-240-01 & FC-244-03.
 - ALTER PROPERTY DRAINS WHERE REQUIRED IN ACCORDANCE WITH FC-220-02.
 - DRIVEWAY CROSSINGS TO BE BUILT IN ACCORDANCE WITH FC-230-01.
 - FOR DETAILS ON KERB RAMP REFER TO STD DRG FC-220-04.
 - REFER TO DRG 03 FOR SETOUT INFORMATION.
 - REFER TO DRG 07 - 08 FOR CROSS SECTIONS.
 - ALL TREES AND VEGETATION TO BE TRIMMED BY QUALIFIED LEVEL 3 ARB.
 - ARBORISTS IN ACCORDANCE WITH AS 4373.
 - TREES OVERHANGING NEW FOOTPATH ARE TO BE TRIMMED TO ACHIEVE SUITABLE CLEARANCES. REFER TYPICAL SECTIONS DRAWING 02.
 - GRADE TYPIC POINTS ARE FROM UNTERDEN UNLESS NOTED OTHERWISE. THEY SHALL BE