

Footpath Construction—Banana Street (Odessa Street to Gick Street)

PROJECT:

This project provides for the construction of 100m of 2.0m wide concrete footpath on the southern side of Banana Street between Odessa Street and Gick Street.

PROJECT ESTIMATE:

\$50,000

PROJECT SCOPE OF WORKS:

The Project scope is as follows:

- Concrete footpath construction
- Driveway Reconstructions (85 Odessa Street & 109 Banana Street)
- New kerb ramp
- Topsoiling and reinstatement of nature strip

The traffic management plan that will be put in place for the duration of the construction period will be developed prior to works commencing.





INDICATIVE PROJECT MILESTONES

Oct 2019	Final Design
June/July 2020	Construction Period
August 2020	Project Completion

Note: Project milestones are subject to weather and may change.

Footpath Construction—Banana Street (Odesa Street to Gick Street)

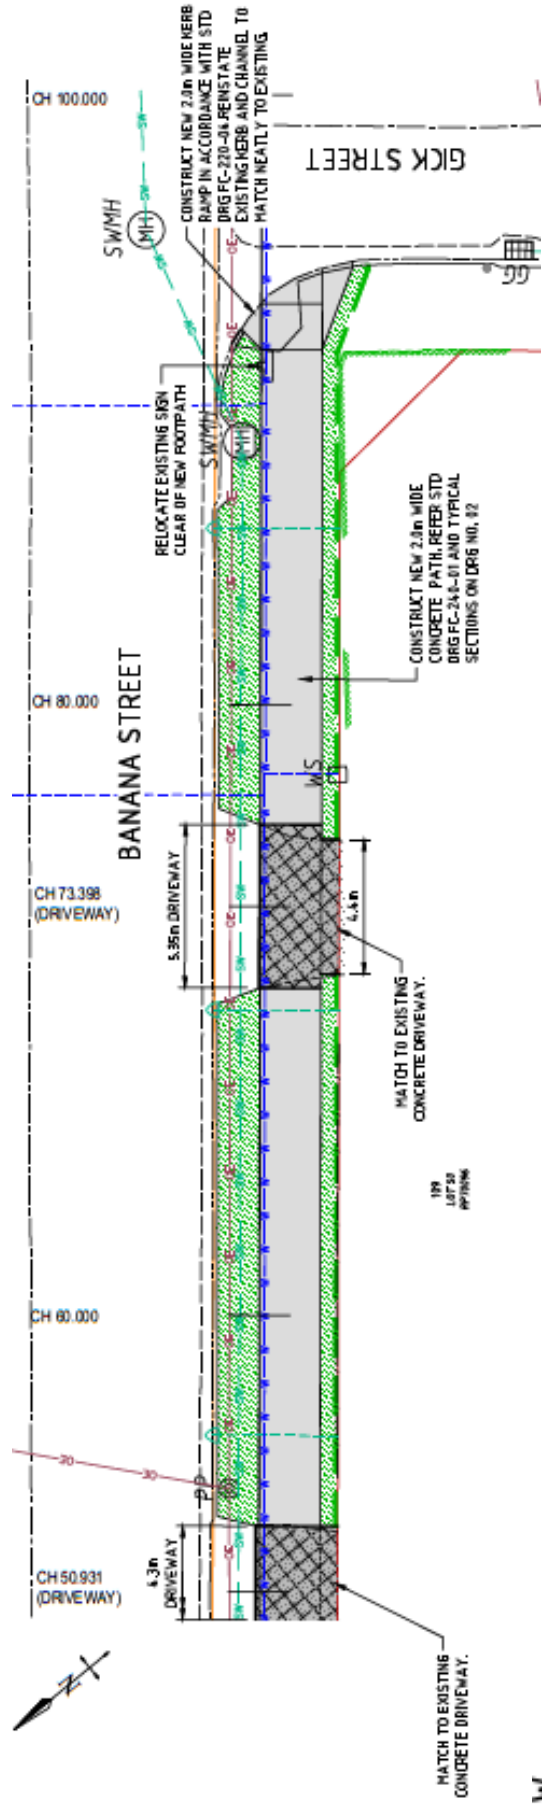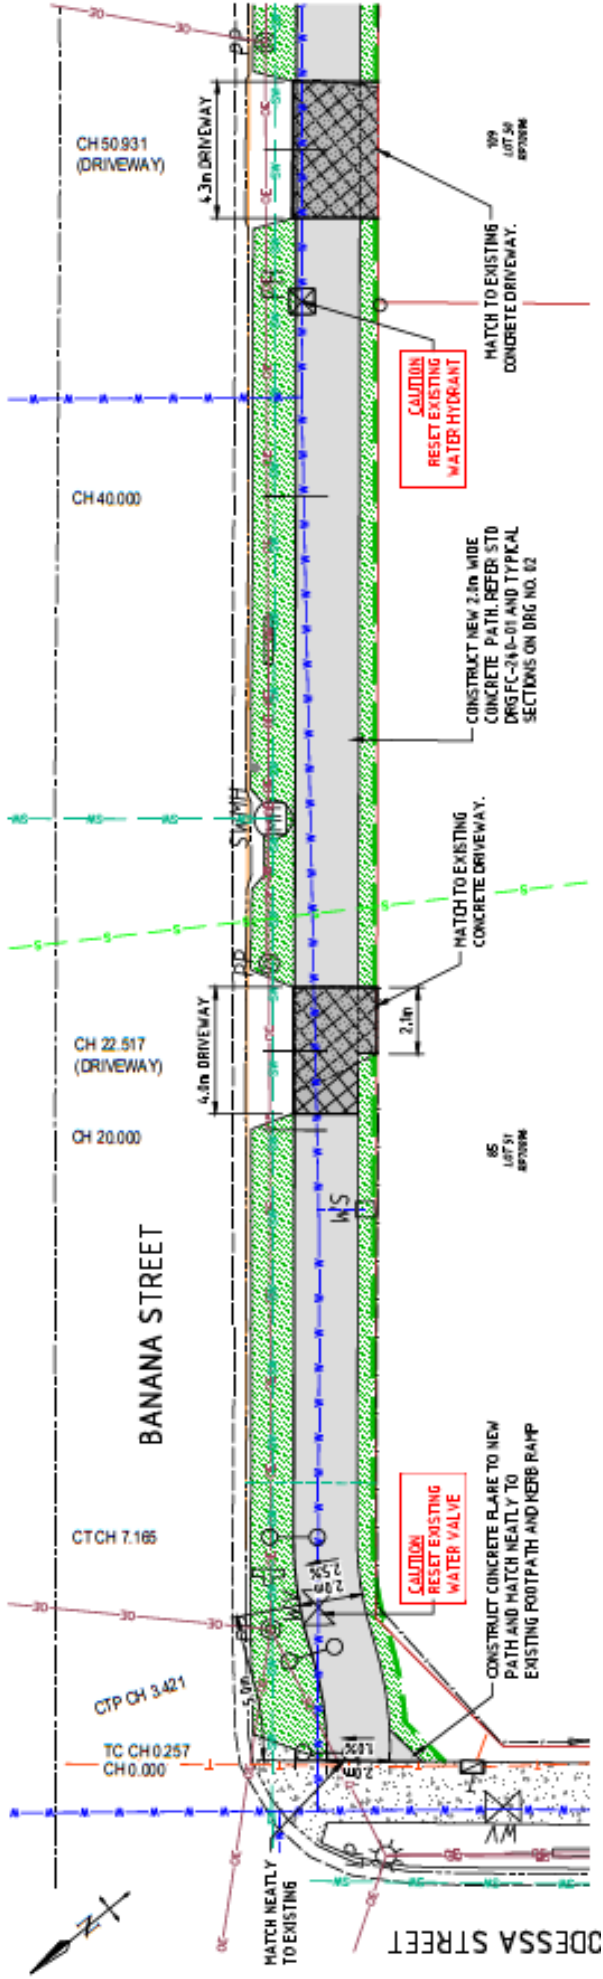

LEGEND - NEW

- NEW CONCRETE FOOTPATH (SL62 MESH, 100mm THICK)
- NEW RESIDENTIAL DRIVEWAY (SL72 MESH, 125mm THICK)
- NEW TURF
- NEW EARTHWORKS BATTER