



Alteration of Service Lids —Maryborough Area

PROJECT:

This project provides for alterations to fire hydrant covers, service valve covers and sewer and stormwater manholes.

These works are required to ensure that the services are altered to meet the new finished road surface levels of recently completed resurfacing works.

The areas where the alteration to services are required is detailed below:-

- Queen Street (between March & Fort Sts)
- Albert Street (between Fort Lane and Guava St)


PROJECT ESTIMATE:

\$40,000

PROJECT SCOPE OF WORKS:

The Project scope is as follows:

- Services to be altered to meet the new finished surface level of recently completed resurfacing works using rapid set concrete and backfilled with hot mix asphalt

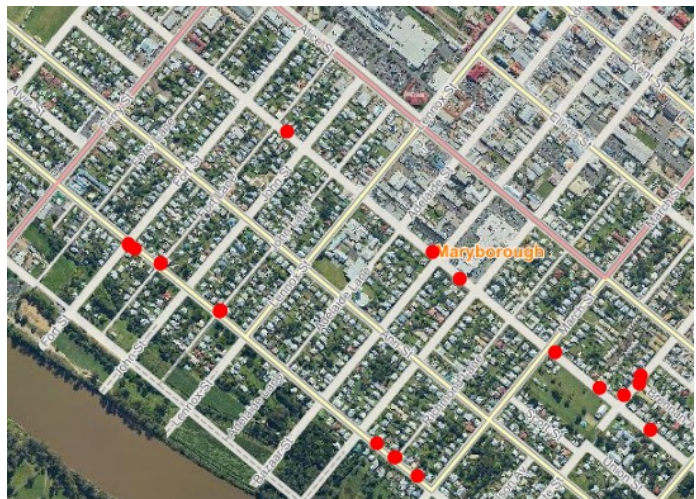

See larger layout plans attached for more detail (Page 2)

The Contractors program will provide detail of traffic management for the duration of the construction period and/or detail traffic management arrangements including detours available.

INDICATIVE PROJECT MILESTONES

July 2020	Tender Period
Aug 2020	Construction Period
Sep 2020	Project Completion

Note: Project milestones are subject to contract and weather and may change.

Lifting of Services —Maryborough Area

Location 3 – Queen St Maryborough (Between March Street and Fort Street)

Services to be Altered

- 10 x Fire Hydrant/ Service Valve Cover
- 2 x Sewer/ Stormwater Manholes

Locations as below:



Lifting of Services —Maryborough Area

Location 3 – Queen St Maryborough (Between March Street and Fort Street)



Lifting of Services —Maryborough Area

Location 4 – Albert Street Maryborough (Between Fort Lane and Guava Street)

Services to be Altered

- 6 x Fire Hydrant/ Service Valve Cover
- 3 x Sewer/ Stormwater Manholes

Locations as below:



Lifting of Services —Maryborough Area

Location 4 – Albert Street Maryborough (Between Fort Lane and Guava Street)

