


Alteration of Service Lids —Hervey Bay Area

PROJECT:

This project provides for alterations to fire hydrant covers, service valve covers and sewer and stormwater manholes.

These works are required to ensure that the services are altered to meet the new finished road surface levels of recently completed resurfacing works.

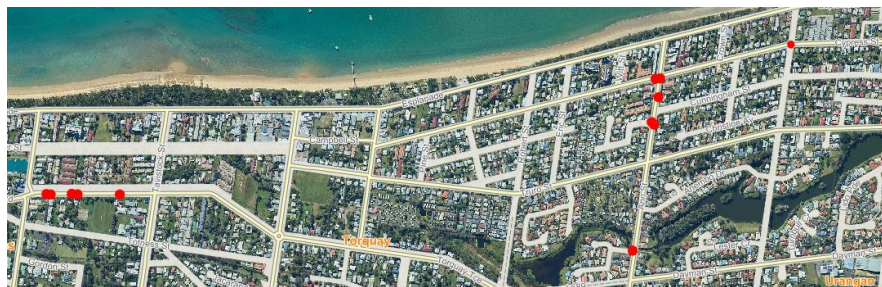

See larger layout plans attached for more detail (Page 2)

The areas where the alteration to services are required is detailed below:-

- Ann Street (Cypress Street to Banks Court)
- Torquay Terrace (Tavistock Street to Denmans Camp Road)

The Contractors program will provide detail of traffic management for the duration of the construction period and/or detail traffic management arrangements including detours available.

PROJECT ESTIMATE:

\$30,000

INDICATIVE PROJECT MILESTONES	
July 2020	Tender Period
Aug 2020	Construction Period
Sep 2020	Project Completion

Note: Project milestones are subject to contract and weather and may change.

PROJECT SCOPE OF WORKS:

The Project scope is as follows:

- Services to be altered to meet the new finished surface level of recently completed resurfacing works using rapid set concrete and backfilled with hot mix asphalt

Lifting of Services —Hervey Bay Area

Location 1 – Ann Street Torquay – (Cypress Street to Banks Court)

Services to be Altered

- 2 x Sewer/Stormwater Manhole
- 4 x Fire Hydrant/ Service Valve Cover

Locations as below:



Lifting of Services — Hervey Bay Area

Location 2 – Torquay Terrace, Torquay – (Tavistock Street to Denmans Camp Road)

Services to be Altered

- 5 x Fire Hydrant/ Service Valve Cover

Locations as below:

