

Kerb and Channel Construction and Widening — Walworth Street (Gympie Road to Tulipwood Drive)

PROJECT:

This project provides for the construction of the missing areas of kerb and channel and road widening in Walworth Street between Gympie Road and Tulipwood Drive, Tinana.

These works will complete kerb and channel works in this section of Walworth Street.

PROJECT ESTIMATE:

\$150,000

PROJECT SCOPE OF WORKS:

The Project scope is as follows:

- Excavation and earthworks;
- New kerb and channel;
- New driveway crossovers x 2;
- New road pavement widening to match to new kerb;
- Topdressing and turfing of disturbed areas.

The traffic management plan that will be put in place for the duration of the construction period will be developed prior to works commencing.




INDICATIVE PROJECT MILESTONES

September 2020	Final Design
Oct/Dec 2020	Construction Period
Jan 2021	Project Completion

Note: Project milestones are subject to weather and may change.

Kerb and Channel Construction and Widening —

Walworth Street (Gympie Road to Tulipwood Drive)

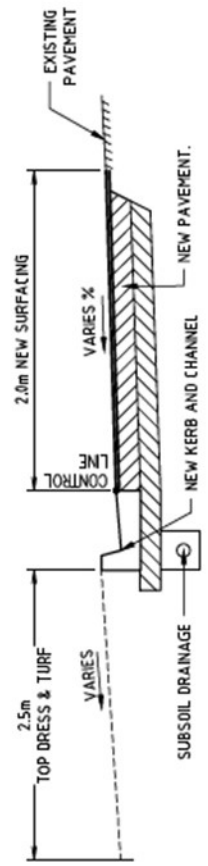

TYPICAL SECTION (BOTH SIDES)
NOT TO SCALE