



# Footpath Construction—Woodstock Street (Cheapside Street to Ariadne Street)

### PROJECT:

This project provides for the construction of a 1.3m wide concrete footpath on the southern side of Woodstock Street from Cheapside Street to Ariadne Street.

This project was identified for completion as part of Council’s Active Travel Strategy.

### PROJECT ESTIMATE:

\$200,000 (this project is funded through the State Government’s Covid Works for Queensland Funding Program)

### PROJECT SCOPE OF WORKS:

The Project scope is as follows:

- Excavation and earthworks;
- Concrete footpath works;
- New concrete crossovers and driveways at 130 Woodstock St, 128 Woodstock St, 126 Woodstock St, 124 Woodstock St, 122 Woodstock St, 120 Woodstock St and 204 Cheapside St;
- Replacement of existing footpath kerb ramps;
- Removal of two (2) Poinciana trees adjacent to 130 and 122 Woodstock Street;
- Topdressing and turfing of disturbed areas.




The traffic management plan that will be put in place for the duration of the construction period will be developed prior to works commencing.

### INDICATIVE PROJECT MILESTONES

May 2020	Final Design
Oct/Jan 2021	Construction Period
Feb 2021	Project Completion

Note: Project milestones are subject to weather and may change.

# Footpath Construction—Woodstock Street (Cheapside Street to Ariadne Street)

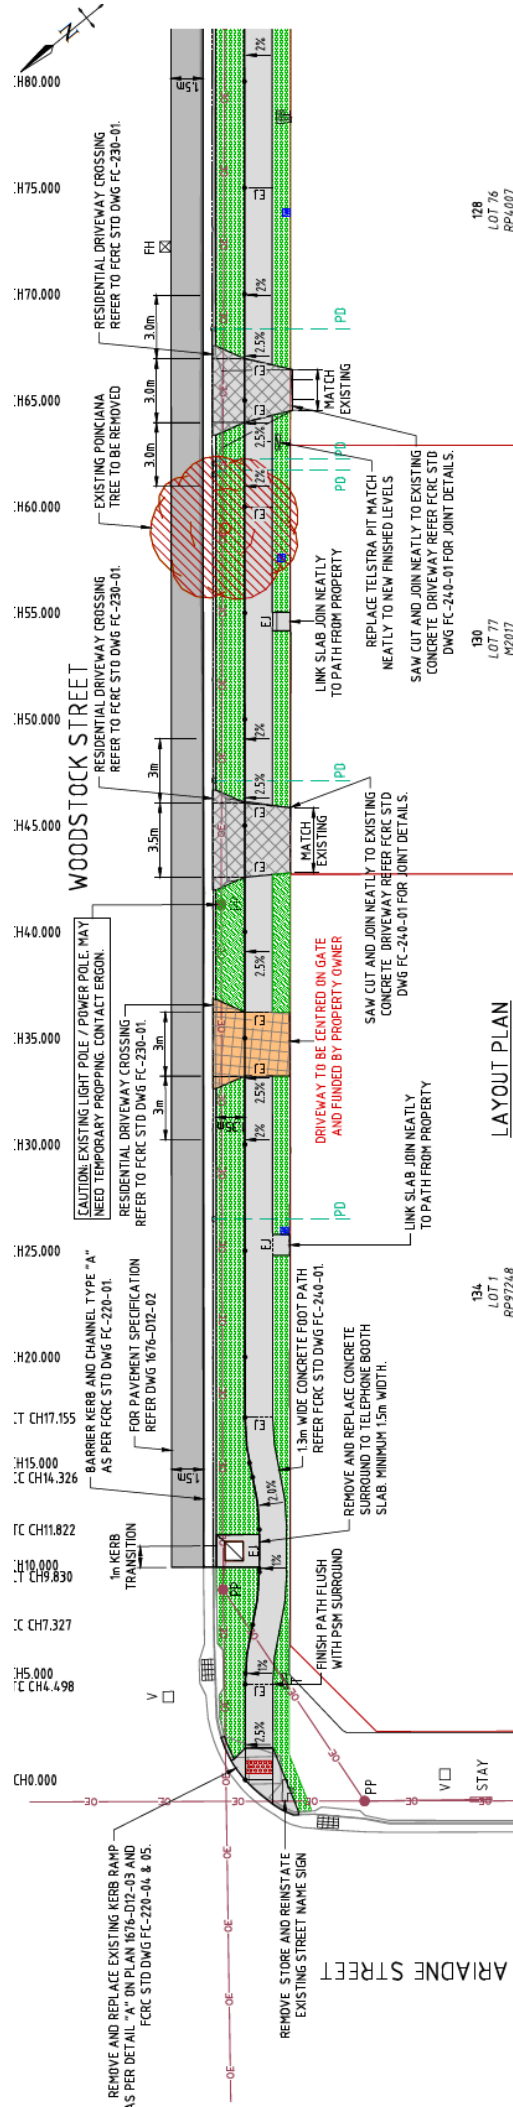


134  
LOT 1  
RP97248

LAYOUT PLAN  
SCALE H 1:950

130  
LOT 77  
M2017

128  
LOT 76  
RP4007

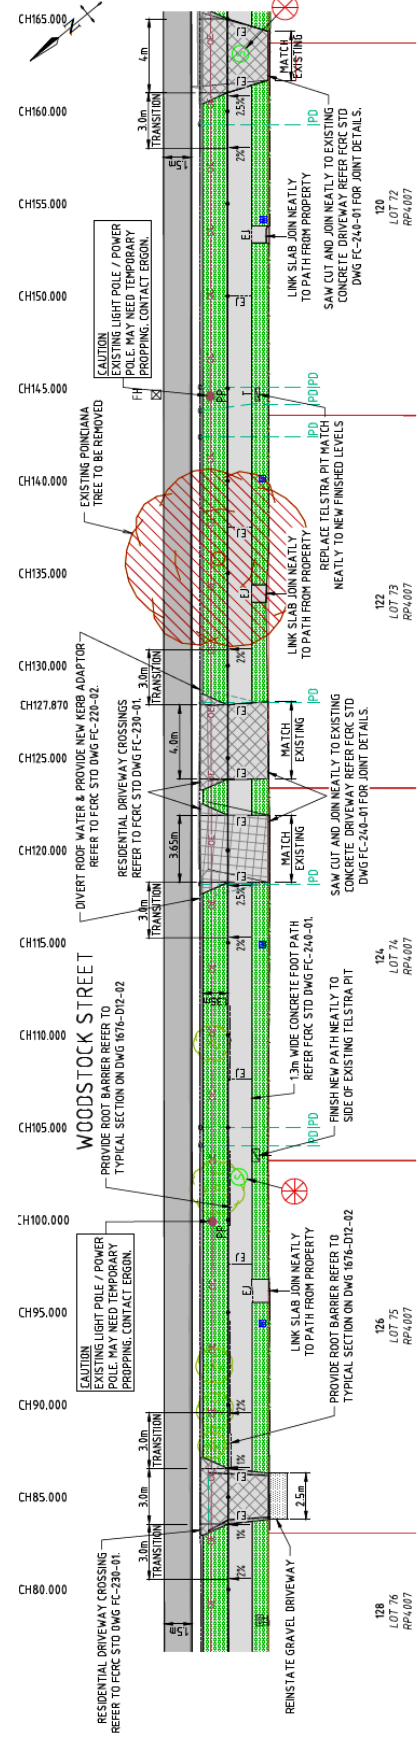

128  
LOT 76  
RP4007

126  
LOT 75  
RP4007

124  
LOT 74  
RP4007

122  
LOT 73  
RP4007

120  
LOT 72  
RP4007

ADJUST EXISTING SEWER LID TO MATCH NEATLY INTO NEW PATH

LAYOUT PLAN  
SCALE H 1:950

LAYOUT PLAN  
SCALE H 1:950

LAYOUT PLAN  
SCALE H 1:950

LAYOUT PLAN  
SCALE H 1:950

