



# FACT SHEET

November 2020

## Kerb and Channel Replacement — Tanner Street (Alice Street to Edward Street)

### PROJECT:

This project provides for the replacement of the existing kerb and channel and pavement reinstatement works on both sides of Tanner Street between Alice Street and Edward Street.


The kerb and channel works are being undertaken as a result of inspections carried out as part of Council's ongoing asset inspection program which identified that the kerb and channel was showing signs of failure and distress.

### PROJECT ESTIMATE:

\$220,000

### PROJECT SCOPE OF WORKS:

- Removal and disposal of the existing kerb and channel;
- Earthworks and stormwater pit replacements with associated drainage works;
- Construction of new kerb and channel and pavement reinstatement;
- Reinstatement of driveway crossovers and kerb ramps;
- Reinstatement of disturbed verges.

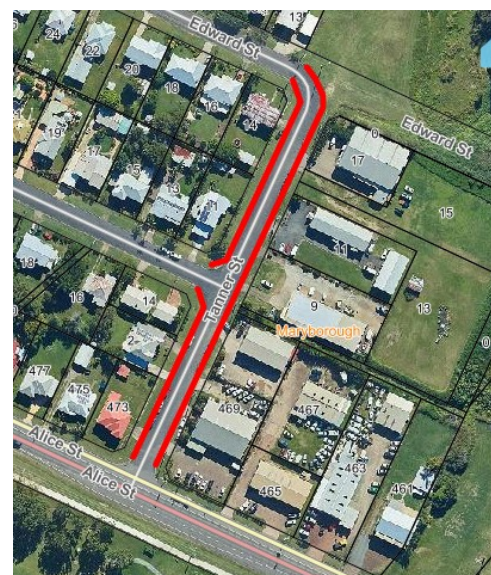



The traffic management plan that will be put in place for the duration of the construction period will be developed prior to works commencing.

### INDICATIVE PROJECT MILESTONES

July 2020	Final Design
Dec/Feb 2021	Construction Period
March 2021	Project Completion

Note: Project milestones are subject to weather and may change.

# Kerb and Channel Replacement — Tanner Street (Alice Street to Edward Street)

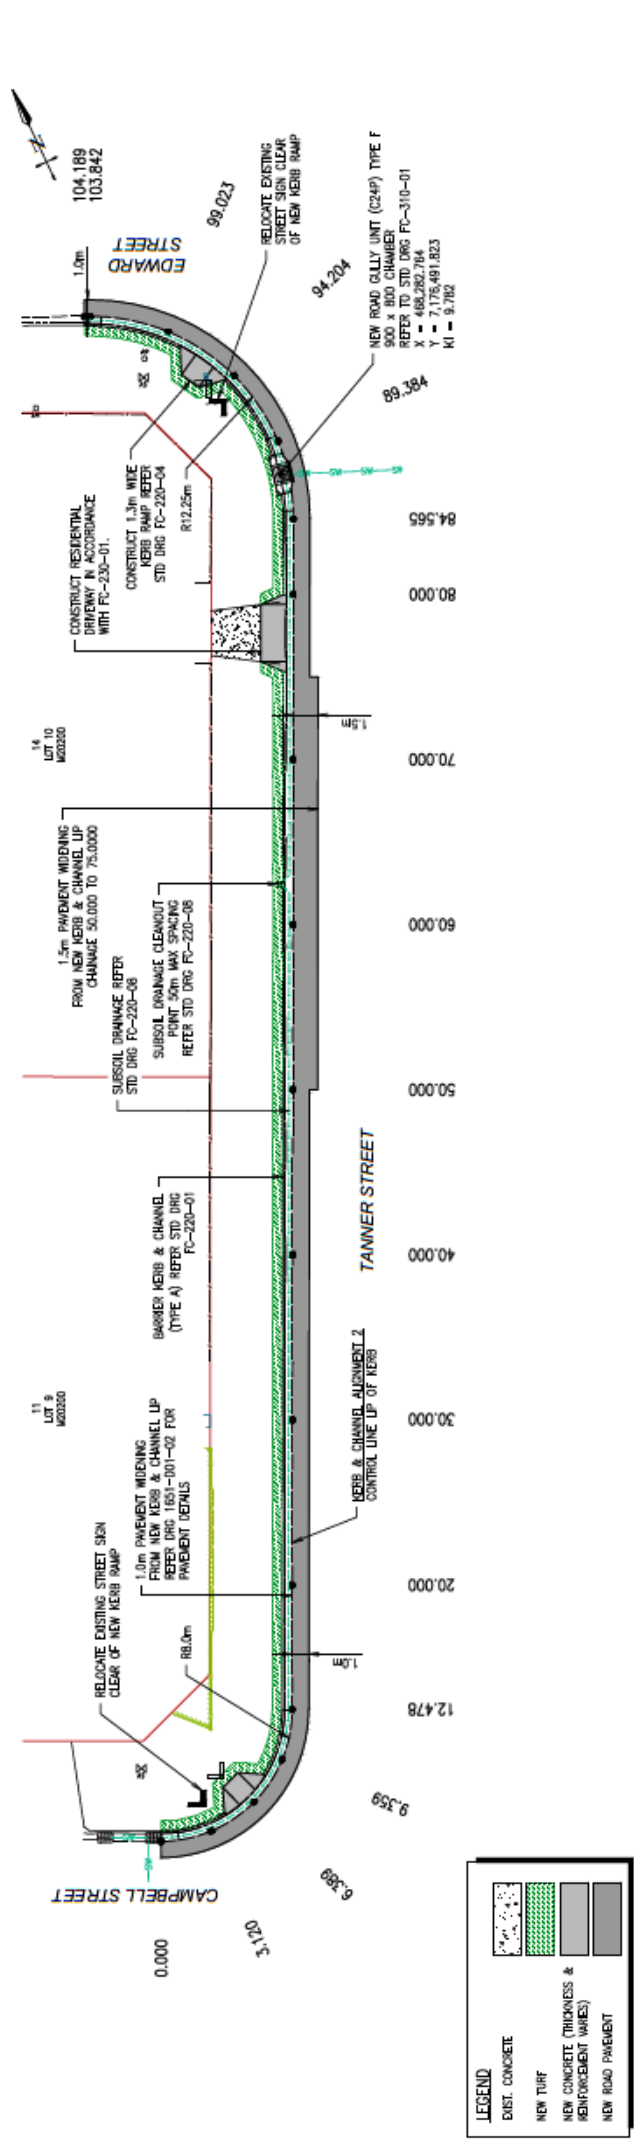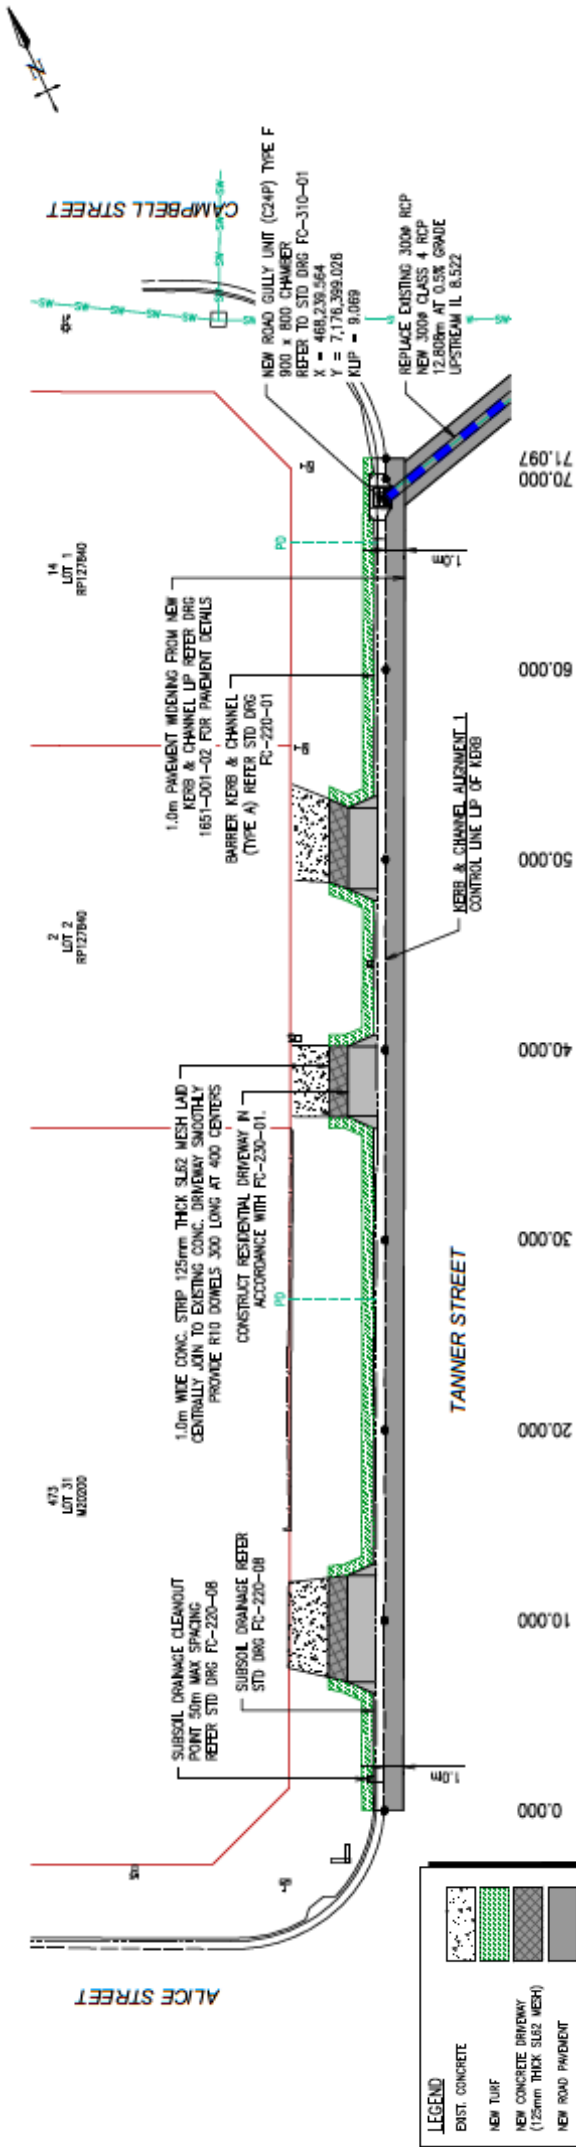



**LEGEND**

- EXIST. CONCRETE
- NEW TURF
- NEW CONCRETE DRIVEWAY (125mm THICK SL82 MESH)
- NEW ROAD PAVEMENT

**LEGEND**

- EXIST. CONCRETE
- NEW TURF
- NEW CONCRETE (THICKNESS & REINFORCEMENT VARIES)
- NEW ROAD PAVEMENT

# Kerb and Channel Replacement — Tanner Street to Edward Street

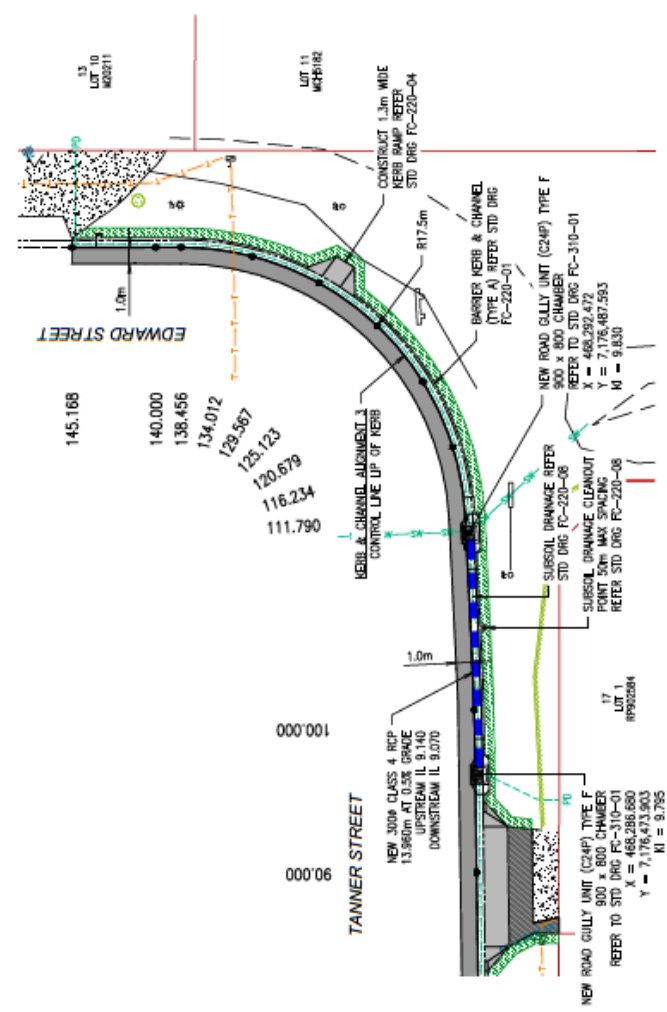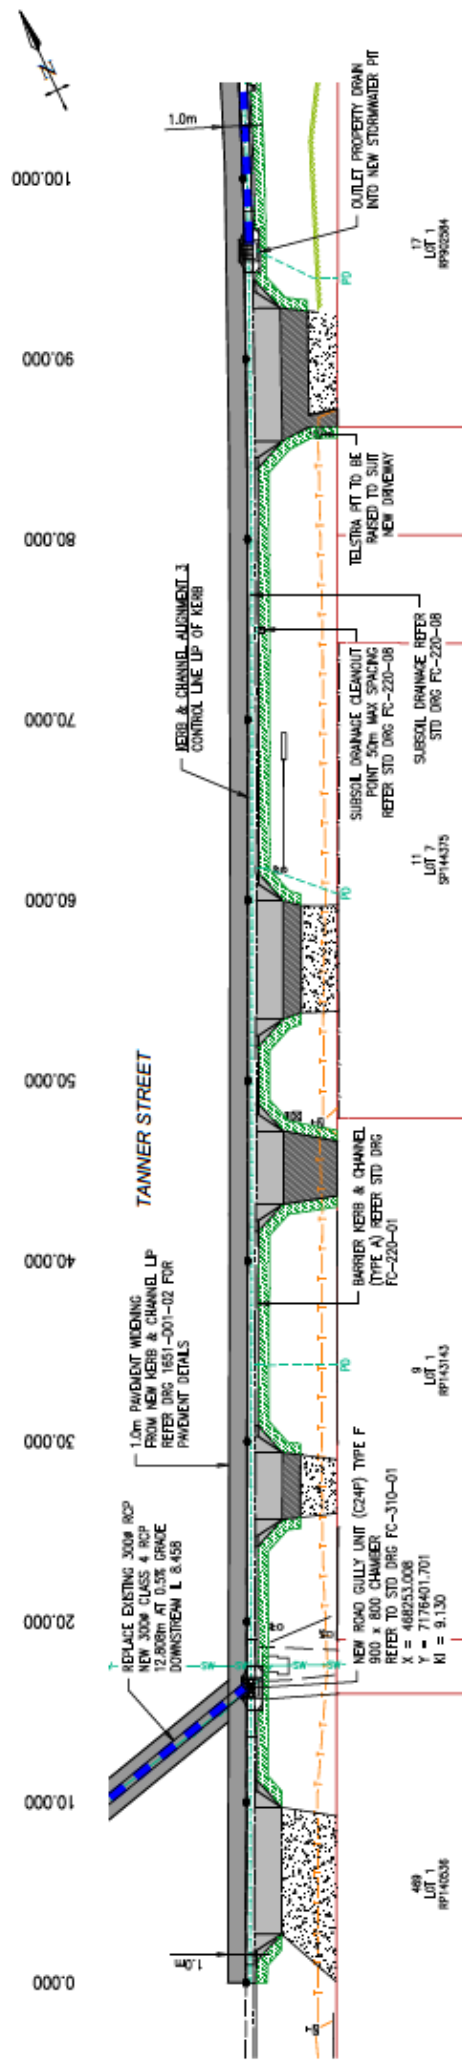

LEGEND	
	EXIST. CONCRETE
	NEW TURF
	NEW CONCRETE DRIVEWAY (175mm THICK SL72 MESH)
	NEW ROAD PAVEMENT