

Footpath Construction— Woodstock St (Neptune to Bryant St) & Replacement of Kerb and Channel—Woodstock St (Bell to Bryant St)

PROJECT:

This project provides for the construction of a 1.3m wide concrete footpath on the southern side of Woodstock Street, Maryborough from Neptune Street to Bryant Street. Additionally as part of this project, the kerb and channel in Woodstock Street from Bell Street to Bryant Street on the southern side will also be replaced, along with stormwater pipe replacement and associated works in the Bell/Woodstock intersection.

The footpath project was identified for completion as part of Council's Active Travel Strategy with the kerb and channel works being undertaken as a result of inspections carried out as part of Council's ongoing asset inspection program which identified that the kerb and channel was showing signs of failure and distress.

PROJECT ESTIMATE:

\$320,000 (this project is funded through the State Government's Works for Queensland Funding Program)

PROJECT SCOPE OF WORKS

The Project scope is as follows:

- General Earthworks and stormwater pipe replacement with stormwater pips and house connections;
- Concrete Footpath Works;
- Removal and construction of new kerb and channel (Bell St to Bryant St only);
- Installation of new driveway crossovers at 224 Neptune St, 10 Bell St and 192, 194, 198, 200 and 202 Woodstock St;
- Restoration Works.




The traffic management plan that will be put in place for the duration of the construction period will be developed prior to works commencing.

INDICATIVE PROJECT MILESTONES

Dec 2020	Final Design
Dec/Jan 2021	Tender Period
Feb/April 2021	Construction Period
May 2021	Project Completion

Note: Project milestones are subject to weather and may change.

**Footpath Construction — Woodstock St (Neptune to Bryant St) &
Replacement of Kerb and Channel — Woodstock St (Bell to Bryant St)**

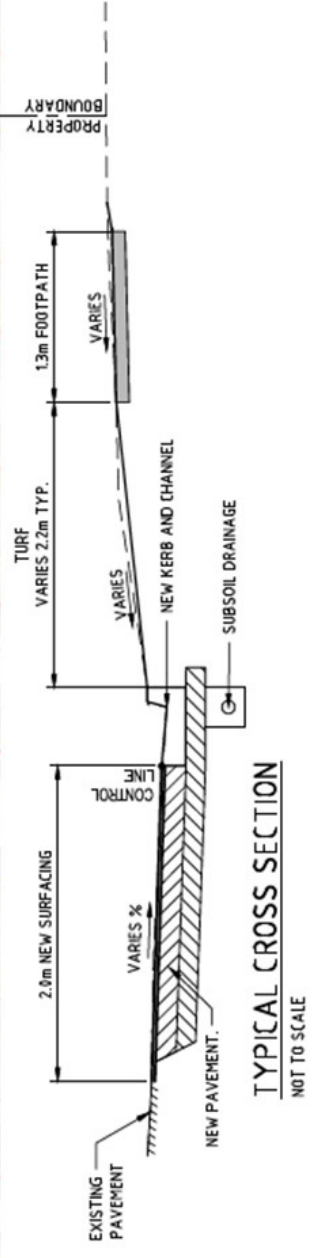

TYPICAL CROSS SECTION
NOT TO SCALE

**WOODSTOCK STREET - BRYANT STREET TO NEPTUNE STREET, MARYBOROUGH
FOOTPATH CONSTRUCTION AND KERB AND CHANNEL REPLACEMENT**