

## Sectional Kerb and Channel Replacement—Ferry Street

### PROJECT:

This project provides for the replacement of approximately 45m of existing kerb and channel on the western side of Ferry Street, between Meredith Street and Ellena Street. The works also include the replacement of an existing roadside gully unit and pit and pavement reconstruction works at a width of 2m from the kerb along the length of the project.

The works are being undertaken as a result of inspections carried out as part of Council’s ongoing asset inspection program which identified that the kerb and channel was showing signs of failure and distress.

### PROJECT ESTIMATE:

\$87,000

### PROJECT SCOPE OF WORKS:

The Project scope is as follows:

- Excavation and earthworks;
- Replacement of 45m of existing kerb and channel on the western side of Ferry Street between Meredith Street and Ellena Street;
- Replacement of existing roadside gully unit and pit;
- Pavement reconstruction at a width of 2m from the kerb along the length of the project;
- Topdressing and turfing of disturbed areas.




The traffic management plan that will be put in place for the duration of the construction period will be developed prior to works commencing.

### INDICATIVE PROJECT MILESTONES

July 2022	Final Design
April/May 2023	Construction Period
June 2023	Project Completion

Note: Project milestones are subject to weather and may change.

# Sectional Kerb and Channel Replacement—Ferry Street

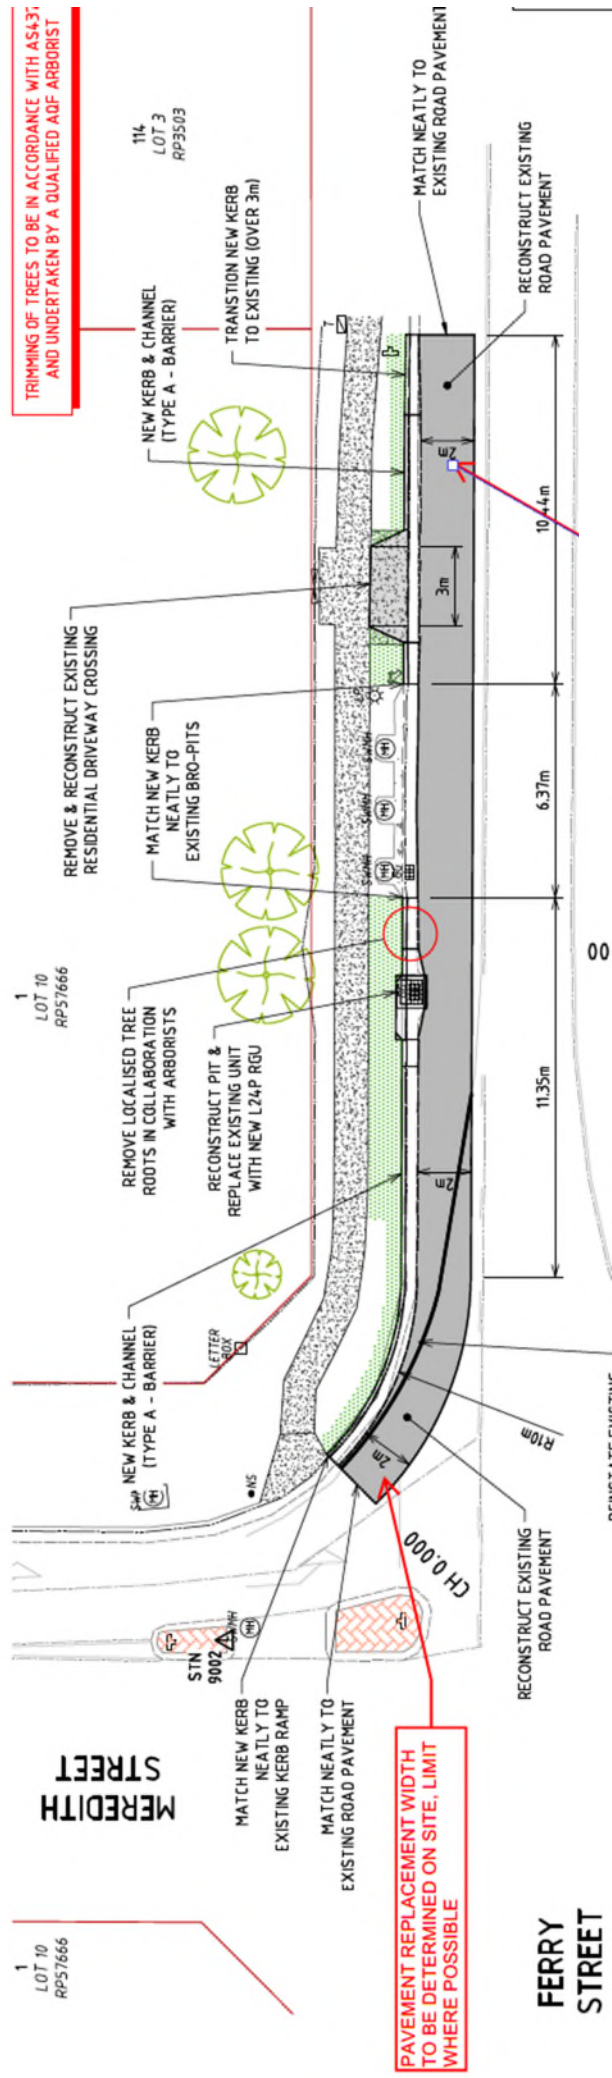

### LEGEND - EXISTING

	EXISTING PROPERTY BOUNDARY
	EXISTING FENCE
	EXISTING KERB AND CHANNEL
	EXISTING EDGE OF BITUMEN
	EXISTING ROAD CROWN
	EXISTING SIGN
	EXISTING CONCRETE
	EXISTING VEGETATION
	NEW KERB & CHANNEL
	NEW CONCRETE
	NEW ROAD PAVEMENT