

Footpath Construction – Urraween Road (Main Street to Richard Charles Drive)

PROJECT:

This project provides for the construction of a 3m wide concrete footpath for a distance of approximately 165m on the northern side of Urraween Road from Main Street to the existing pathway connection to Richard Charles Drive.

This project was identified for completion as part of Council’s Active Travel Strategy.

PROJECT ESTIMATE:

\$170,000 (this project is funded through the State Government’s Works for Queensland Funding Program)

PROJECT SCOPE OF WORKS:

The project scope is as follows:

- Excavation and earthworks;
- Construction of a new 3m wide concrete pathway in Urraween Road from Main Street to the existing pathway connection to Richard Charles Drive;
- Inclusion of eight (8) Water Sensitive Urban Design (WSUD) street trees;
- Topdressing and turfing of disturbed areas.













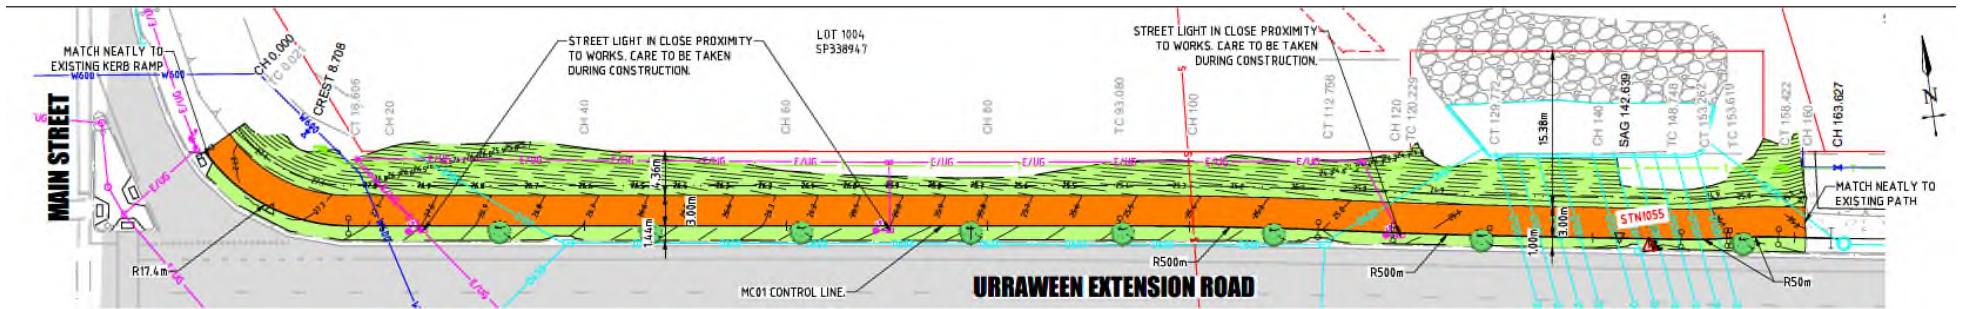


The traffic and pedestrian management plan that will be put in place for the duration of the construction period will be developed prior to works commencing.

INDICATIVE PROJECT MILESTONES	
October 2023	Construction Period
November 2023	Project Completion

Note: Project milestones are subject to weather and may change.

Footpath Construction – Urraween Road (Main Street to Richard Charles Drive)



LEGEND			
	PROPOSED CONCRETE FOOTPATH		EXISTING LOT BOUNDARY
	PROPOSED BOTTOM OF BATTER		EXISTING PAVEMENT SURFACING
	PROPOSED CHANGE OF GRADE		EXISTING CONCRETE PATH
	PROPOSED MAJOR CONTOURS		EXISTING KERB INVERT
	PROPOSED MINOR CONTOURS		EXISTING LIP OF KERB
	PROPOSED STREET TREE. REFER TO DWG. 002 FOR DETAILS.		EXISTING BACK OF KERB