

Footpath Construction – Main Street (Vicinity of Main Street and McLiver Street Intersection)

PROJECT:

This project provides for the construction of a 1.5-2.48m wide concrete footpath for a distance of approximately 30m on the northern side of Main Street adjacent to the intersection of Main Street and McLiver Street.

This project was identified for completion as part of a missing link that was created following the construction of a left turn lane in this location.

PROJECT ESTIMATE:

\$50,000



PROJECT SCOPE OF WORKS:

The project scope is as follows:

- Excavation and earthworks;
- Relocation of existing water main and valve;
- Tree trimming;
- Construction of a section of retaining wall;
- Construction of a new 1.5-2.48m wide concrete pathway in Main Street adjacent to the Main Street and McLiver Street intersection;
- Topdressing and turfing of disturbed areas.


The traffic and pedestrian management plan that will be put in place for the duration of the construction period will be developed prior to works commencing.

INDICATIVE PROJECT MILESTONES

October 2023	Final Design
Nov/Dec 2023	Construction Period
December 2023	Project Completion

Note: Project milestones are subject to weather and may change.

Footpath Construction – Main Street

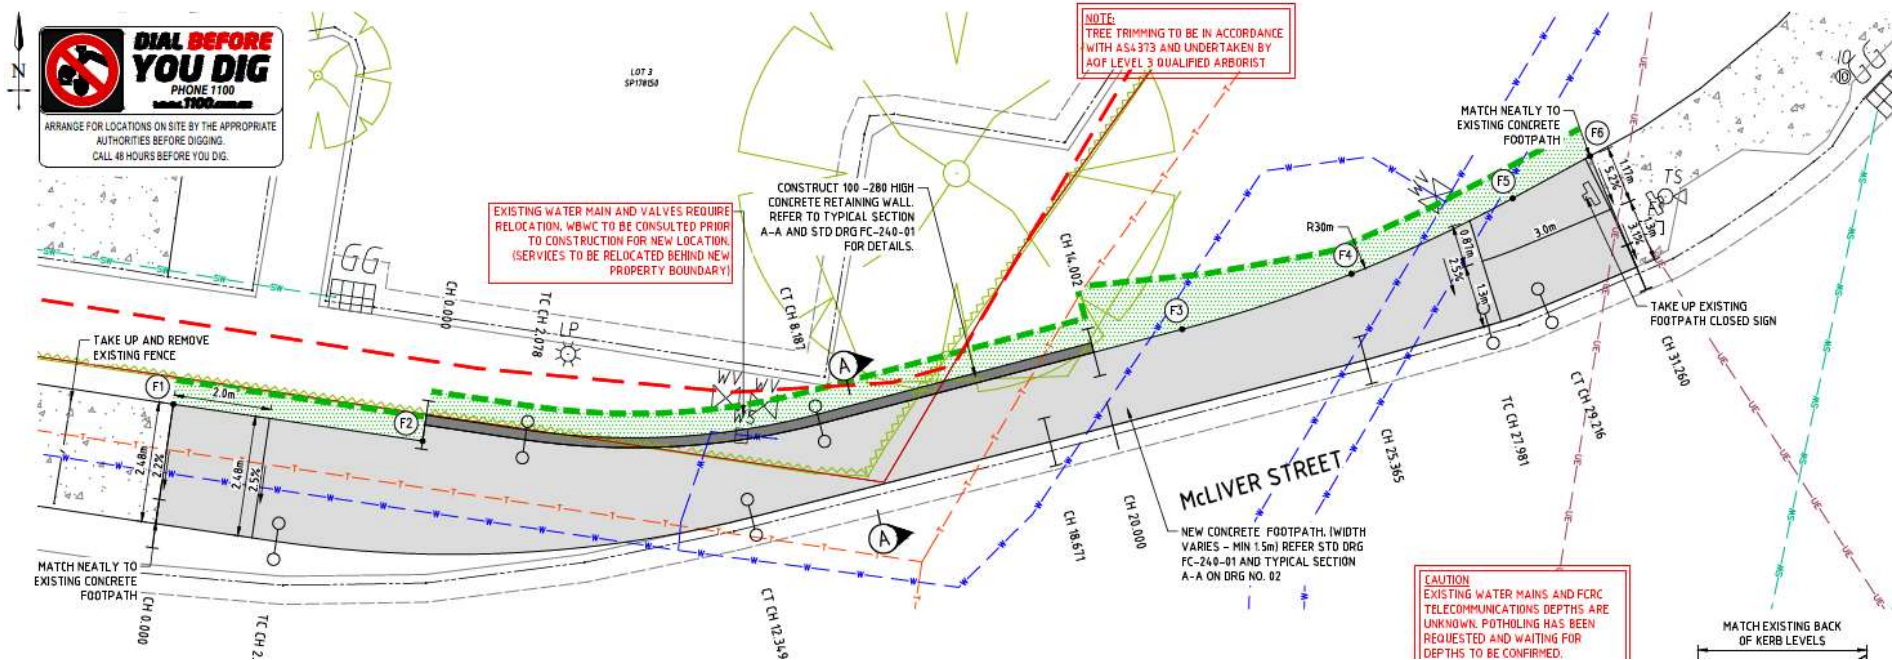

LEGEND - NEW

- NEW RETAINING WALL
- NEW CONCRETE FOOTPATH
- NEW TURF
- NEW EARTHWORKS BATTER
- NEW PROPERTY BOUNDARY