

Kerb and Channel Replacement – Saltwater Creek Road (Woodstock Street to Hutchins Street)

PROJECT:

This project provides for the replacement of the kerb and channel on the eastern side of Saltwater Creek Road between 25 Saltwater Creek Road and Hutchins Street.

The works are being undertaken as a result of inspections carried out as part of Council’s ongoing asset inspection program which identified that the kerb and channel was showing signs of failure and distress.

PROJECT ESTIMATE:

\$250,000 (this project is funded through the State Government’s Works for Queensland Funding Program)

PROJECT SCOPE OF WORKS:

The project scope is as follows:

- Excavation and earthworks;
- Replacement of existing kerb on the eastern side of Saltwater Creek Road between 25 Saltwater Creek Road and Hutchins Street;
- Reconstruction of 7 existing vehicle crossovers at 25, 27, 29, 33, 35, 37, and 39 Saltwater Creek Road (*Note: reinstatement works to be completed in plain concrete only*);
- Reconstruction of existing bus stop concrete area;
- Subsoil drainage works;
- Reconnection of stormwater to outlets;
- Road pavement reinstatement work against excavated kerb areas;
- Topdressing and turfing of disturbed areas.






The traffic management plan that will be put in place for the duration of the construction period will be developed prior to works commencing.

INDICATIVE PROJECT MILESTONES

January 2025	Final Design
Feb/April 2025	Construction Period
May 2025	Project Completion

Note: Project milestones are subject to weather and may change.

Kerb and Channel Replacement – Saltwater Creek Road (Woodstock Street to Hutchins Street)

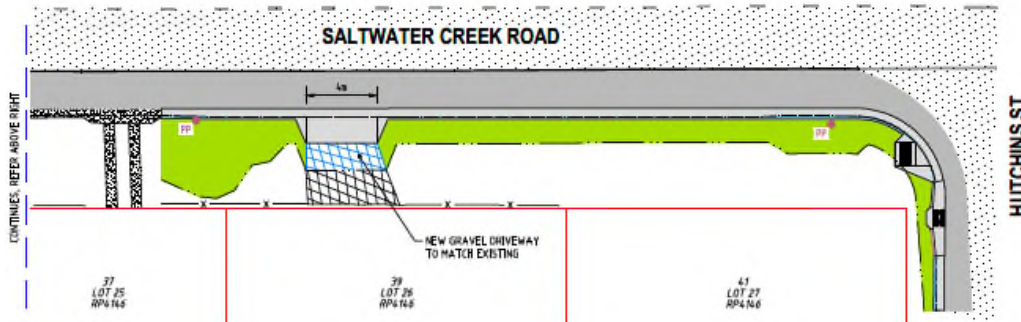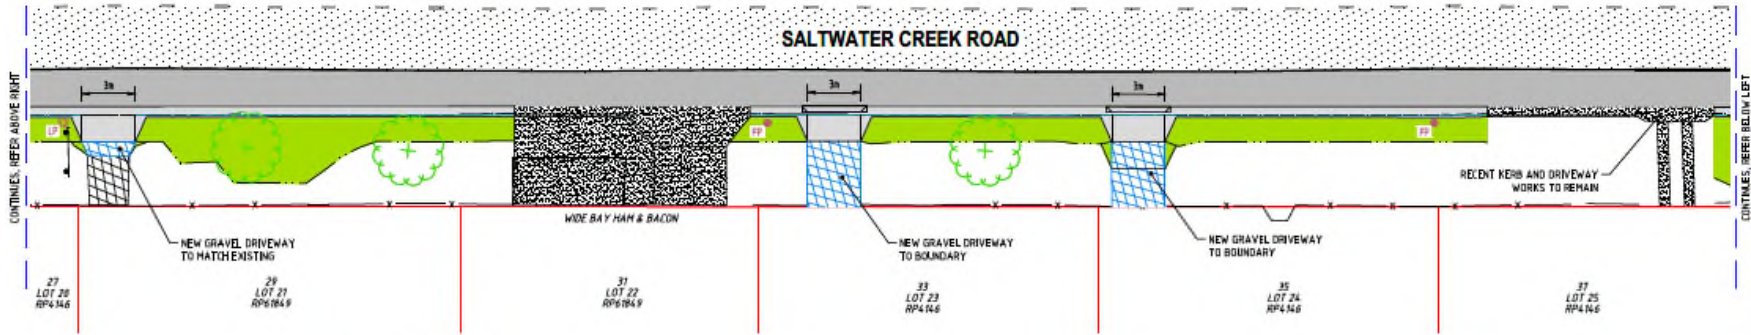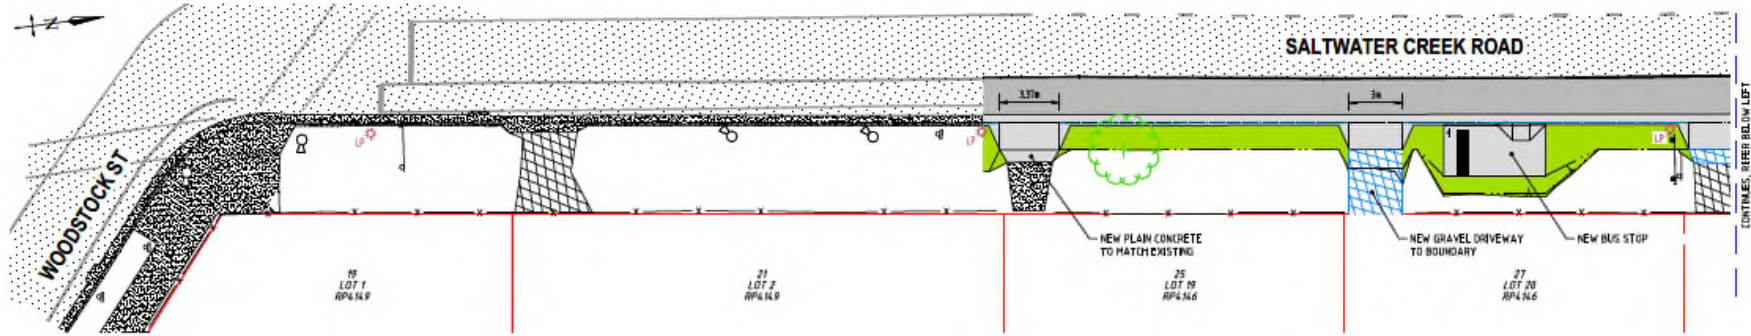

DRIVEWAY NOTE:
WHERE EXISTING DRIVEWAY/TRACKS ARE SEALED, THE REINSTATED DRIVEWAY/TRACKS ARE TO BE OF EQUIVALENT MATERIAL AND SURFACE FINISH.

LEGEND	
	EXISTING PAVEMENT SURFACING
	EXISTING CONCRETE SURFACING
	EXISTING GRAVEL DRIVEWAY
	PROPOSED NEW ASPHALT SURFACING
	PROPOSED NEW CONCRETE DRIVEWAY
	PROPOSED NEW GRAVEL DRIVEWAY
	PROPOSED NEW TOPSOIL AND TURF
	PROPOSED NEW CONCRETE KERB AND CHANNEL